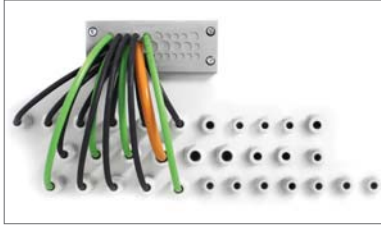


KEL-DPZ 24

Cable entry plates



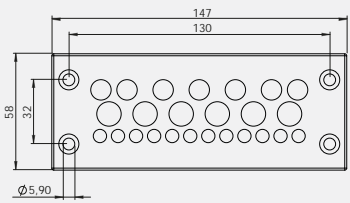
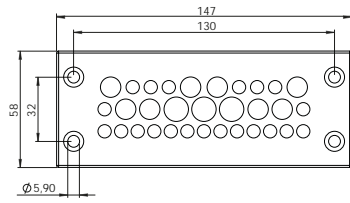
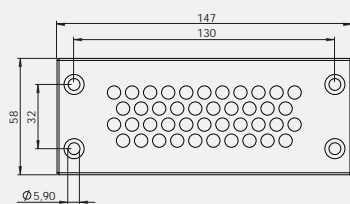
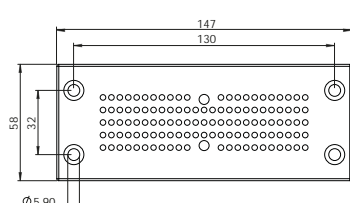
Conical shape on back provides additional sealing and strain relief



High cable density



IP66

Description	Type	Order No.	Number of cables	PU
	KEL-DPZ 24 25	■ 43710 ■ 50710	12× 3.2 - 6.5 mm 7× 4.8 - 9.7 mm 6× 7.5 - 12 mm	10
	KEL-DPZ 24 32	■ 43730 ■ 50730	21× 3.2 - 6.5 mm 8× 5 - 10.2 mm 3× 7.5 - 12 mm	10
	KEL-DPZ 24 42	■ 43715 ■ 50715	42× 3.2 - 6.5 mm	10
	KEL-DPZ 24 121	■ 43735 ■ 50735	119× 1.5 - 2.6 mm 2× 2.5 - 5 mm	10

* Only valid for grey product types.

Advantages & benefits

- Fast and easy assembly
- High cable density
- Dual sealing acc. to IP65/IP66/UL type 12
- Automatic sealing and strain relief for the cable
- Hygienic design

Specifications

Material	Frame: Polyamide (PA)
Colour	Sealing plate: Elastomer ■ grey (similar RAL 7035) ■ black
Flame class	UL94-Vo, self-extinguishing
IP rating	IP65/IP66 (certified acc. to EN 60529)
UL type rating	UL type 12 (acc. to UL 50E)
Temperature	- 40°C to + 90°C (static)
Properties	Halogen-free, silicone-free
Cut-out dimensions	36 × 112 mm / page 218 - 219
Plate depth	14 mm

Accessories

ST-B Plugs	85
KEL-EMC-PF Cable collectors	139
FP Flanged plates	178 - 183