

# KEL-DPZ-KL

## Cable entry plates



**IP65**



Also available in black.



Membrane on front



Conical shape on back provides additional sealing and strain relief

### Product description

2.1

The cable entry plate KEL-DPZ-KL is designed for routing up to 72 cables without connectors.

The assembly of the KEL-DPZ-KL with cables or pneumatic hoses can be done quick and easy. Simply make a small hole in the thin membrane, push the cables through. The KEL-DPZ-KL provides strain relief and protection IP65 / UL type 12.

ST-B Plugs can be used for sealing pierced membranes if cables have been removed.

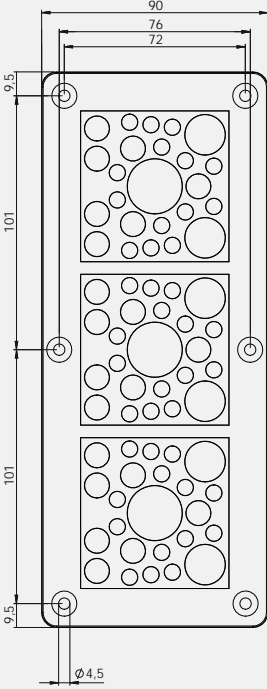
The KEL-DPZ-KL matches on terminal boxes KL by Rittal.

### Advantages & benefits

- Space saving shape
- Dual sealing of cables acc. to IP65/UL type 12
- High cable density
- Fast and easy assembly
- Hygienic design

### Specifications

Material	Frame: Stainless steel V2A, moulded with elastomer Sealing plate: Elastomer Screws: Stainless steel V2A
Colour	<input type="checkbox"/> grey (similar RAL 7035) <input checked="" type="checkbox"/> black
Flame class	UL94-Vo, self-extinguishing
IP rating	IP65 (certified acc. to EN 60529)
UL type rating	UL type 12 (acc. to UL 50E)
Temperature	- 40°C to + 90°C (static)
Properties	Halogen-free, silicone-free
Cut-out dimensions	192 × 62 mm
Plate depth	4 mm

Description	Type	Order No.	Number of cables	PU
	KEL-DPZ-KL 72	<input type="checkbox"/> 43675.001	42× 3.2 - 6.5 mm 21× 5 - 10.2 mm 6× 9 - 16.2 mm 3× 16 - 22 mm	1
		<input checked="" type="checkbox"/> 43675.101		

\* Only valid for grey product types

### Accessories

ST-B Plugs 85